

SPIRALBOHRER (VHW) mit großem Spanraum


Bohr \emptyset = Schaft \emptyset ; Z=2+2 ; auf Anfrage mit 118° Anschlag.



Twist Drills (Solid - TC)

Drill \emptyset = shank \emptyset ; Z=2+2; on request with 118° tip.

\emptyset D x L1 (mm)	Art. Nr.		€/Stück		€/piece	
	rechts/right	links/left	1-19	> 20	> 50	> 50
L = 50mm						
2,5 x 18	3.25.50.01	3.25.50.11	24,20	23,00	21,80	
3,0 x 18	3.03.50.01	3.03.50.11	17,90	17,10	16,10	
4,0 x 20	3.04.50.01	3.04.50.11	21,30	20,20	19,10	
5,0 x 25	3.05.50.01	3.05.50.11	24,70	23,50	22,20	
L = 67mm						
2,5 x 35	3.25.67.01	3.25.67.11	24,90	23,70	22,50	
3,0 x 35	3.03.67.01	3.03.67.11	22,40	21,30	20,10	
4,0 x 35	3.04.67.01	3.04.67.11	23,50	22,40	21,20	
5,0 x 35	3.05.67.01	3.05.67.11	25,30	24,00	22,80	

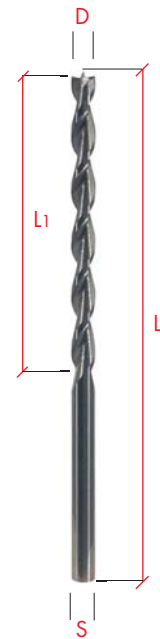

Art. 3.03.67.01
Maßstab 1:1
Full size

BOHRERAUFNAHMEN für o.a. VHW - Spiralbohrer.

\emptyset S = 10 x 20mm mit Spannfläche und Längeneinstellschraube; L = 35mm.

Chucks for twist - drills shown above.

\emptyset S = 10 x 20mm with clamping flat and length adjustment screw; L = 35mm.

\emptyset D (mm)	Art. Nr.	€/Stück		€/piece	
		1-19	> 20	> 50	> 50
2,5	3.25.10	27,00	25,70	24,40	
3,0	3.03.10	27,00	25,70	24,40	
4,0	3.04.10	27,00	25,70	24,40	
5,0	3.05.10	27,00	25,70	24,40	



Art. 3.03.10
Maßstab 1:1
Full size

Andere Abmessungen auf Anfrage.

Different dimensions on request.

